



REV.	Description	Date
1	upgrade drawing	2012/11/15
2	tolerance revise	2016/7/1

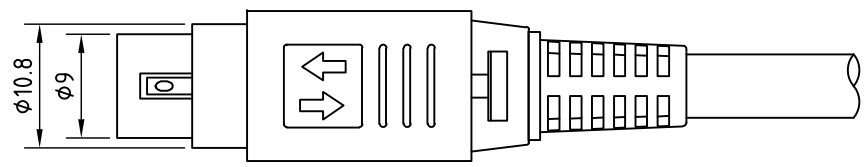

Specification:

1. Current carrying capacity: 12V DC 2A max.
2. Contact resistance: 30mΩ max.
3. Insulation resistance: DC 250V 50MΩ min.
4. Dielectric strength: AC 250V / 1 minute
5. Insertion force: 4.5kgs max.
6. Withdrawal force: 0.9-3Kgs

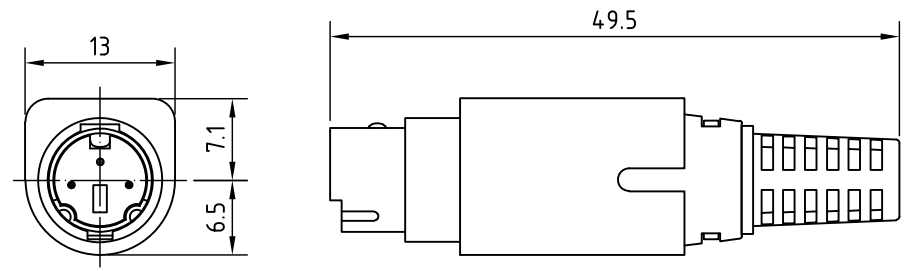

RoHS  
TOLERANCE X±0.5 .X±0.3

9	Plastic trail	PVC	
8	Back body	ABS	
7	Spring	SWPB	
6	Main body	ABS	
5	Lock piece	Brass	Nickel plated
4	Main cover	Brass	Nickel plated
3	Slide ring	POM	
2	Plastic core	Nylon	
1	Terminal	Brass	Silver plated
Item	Description	Material	Treat & Remark

CONTACT ARRANGEMENT FRONT VIEW (MALE)	3P	4P	5P	6P	7P	8P



**Unicable Co., Ltd. 國陽電業有限公司**  
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-L901-XP
DWN	GINA	REV.	2
CHK			
UNIT	MM		

ITEM	Push Lock Mini Din Connector
------	------------------------------