


REV.	Description	Date

Specification of connector

Locking system : screw 13/16" 28UN  
 Shell protection : IP67  
 Rated current : 1.5A  
 Contact resistance :  $\leq 30\text{m}\Omega$   
 Insulation resistance :  $\geq 1000\text{M}\Omega$  at 500V DC

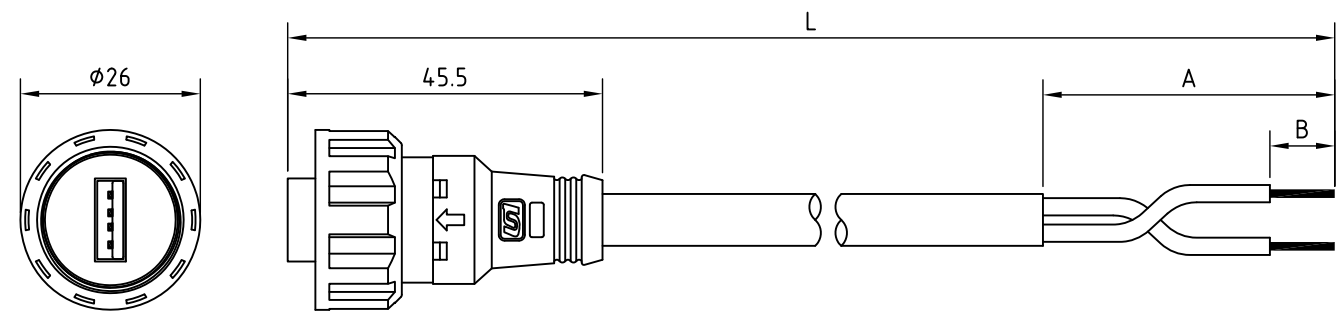

RoHS



**Unicable Co., Ltd. 國陽電業有限公司**  
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D331M-4P
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Waterproof USB series
------	-----------------------