


REV.	Description	Date

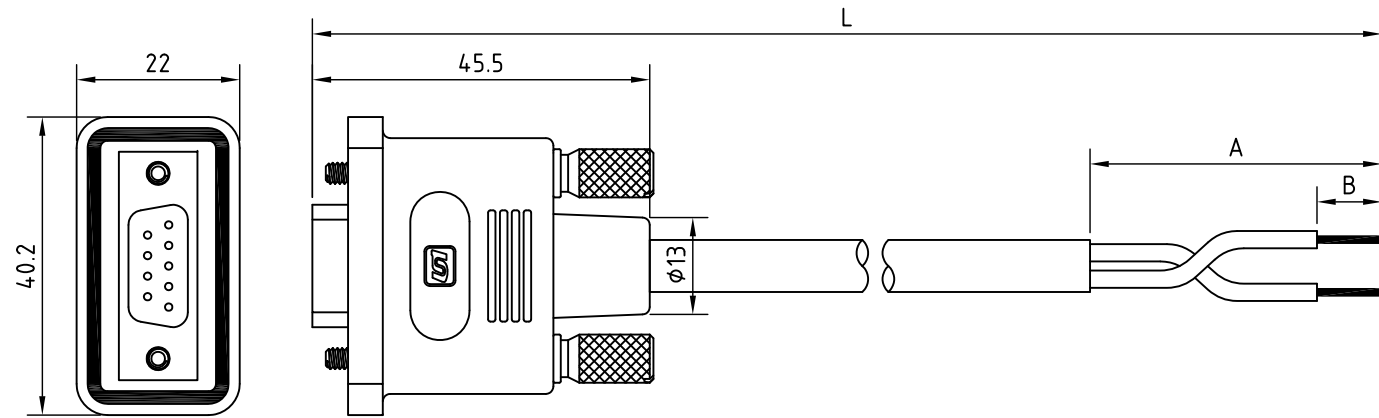

Specification of connector

- Locking system : screw
- Termination : solder
- Shell protection : IP67
- Rated current : 9P/5A ; 15P/2A
- Contact resistance : $\leq 20\text{m}\Omega$
- Insulation resistance : $\geq 500\text{M}\Omega$ at 500V DC

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)		
	UT-D335F-9P	UT-D335F-15P



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D335F-XP
DWN	GINA	REV.	0
CHK			
ITEM	Waterproof D SUB series	UNIT	MM